

- Support for 802.11ax (5G Wi-Fi)
- Distance up to 20 km
- Radio interface with MU-MIMO 2×2
- Transmitter power up to 27 dBm
- Integrated antenna 18 dBi
- Real throughput up to 1300 Mbps
- Access point and client mode
- Passive PoE 24 V
- Reset button on the injector
- TDD



User station

The WB-3P-LR5 wireless user stations are high-performance, multifunctional subscriber devices of the new generation Wi-Fi 6, designed to provide modern high-speed services using Wi-Fi technology.

Wireless connection

WB-3P-LR5 is developed for connection to Wi-Fi access network which might be constructed using base stations within long distances.

Security

To ensure a secure connection, modern authentication technologies are supported. WPA3 encryption is used, as well as centralized authorization via a RADIUS server (802.1X WPA3 Enterprise).  
To manage the user station, the access rights are divided by roles with the ability to authenticate using a local account, as well as via a RADIUS server.

Performance

For stable and continuous operation of the device, the high-performance processors are used, providing the highest data routing speed and the best efficiency of FBWA (Fixed Broadband Wireless Access) technology.

Power

The PoE+ technology makes it possible to install the equipment anywhere, regardless of the power supply location, reduces total cost by discarding power cables and makes installation easier and faster.

Interface configuration


| Name      | WAN             | LAN  |
|-----------|-----------------|------|
| WB-3P-LR5 | 802.11a/n/ac/ax | 1×1G |

Use case

WB-3P-LR5  
wireless user station



Wi-Fi 802.11ax  
5 GHz

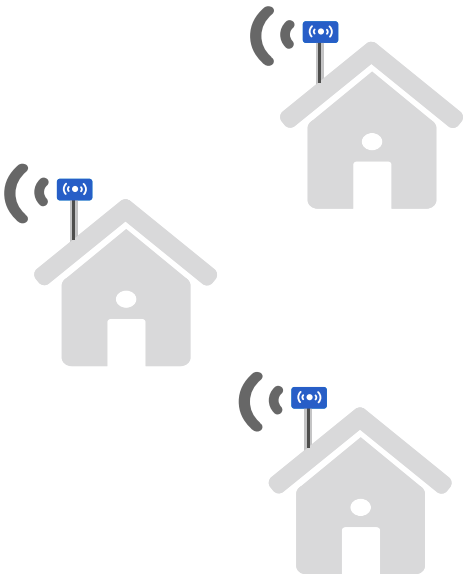

## Features and capabilities

### Interfaces

- 1 port of Ethernet 10/100/1000BASE-T (RJ-45) with PoE support
- Wi-Fi 5 GHz IEEE 802.11a/n/ac/ax

### WLAN

- Support for IEEE 802.11a/n/ac/ax standards
- Data aggregation, including A-MPDU (Tx/Rx) and A-MSDU (Rx)
- WMM-based priorities and packet planning
- Dynamic Frequency Selection (DFS)
- Access point mode (AP-PTP/AP-PMP)
- Client mode (STA)
- Auto-distance detection
- Automatic transmitter power control
- Support for hidden SSID
- Support for MAC ACL
- Third-party access points detection
- Support for APSD
- Channel list limiting
- Spectrum analyzer
- Fixed center frequency support
- Support for TDD
- Antenna alignment

### Network features

- Automatic speed negotiation and duplex mode
- VLAN (Access, Trunk, General)
- C-VLAN
- Management VLAN
- DHCP client
- VLAN Mapping
- Loopback Detection
- MVR
- NTP
- Syslog
- DHCP Snooping
- IGMP Snooping (limit on the maximum number of groups)
- Limiting the number of MAC addresses learned (MAC learning)
- BPDU
- IPv6
- LLDP
- Ping Watchdog

### QoS functions

- Bandwidth limiting
- Configuring WMM parameters for the radio interface
- Priority by 802.1p, DSCP and VLAN ID
- Traffic priority based on MAC/IP address

### Security

- Centralized authentication via RADIUS server (802.1X WPA/WPA2/WPA3 Enterprise)
- WPA/WPA2/WPA3/OWE encryption
- Authorization via RADIUS server when logging
- User authentication security system when logging

### Configuration

- Remote management via Telnet, SSH
- Web interface
- CLI
- NETCONF
- SNMP

### Wireless interface specifications

- Frequency range 5150–5975 MHz
- BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulations
- Built-in sector antenna
- Support for MU-MIMO 2x2
- Support for OFDMA
- Bandwidth: 5, 10, 20, 40, 80, 160 MHz
- Channel selection with 5 MHz increment

### Operating channels<sup>1</sup>

- 802.11a/n/ac/ax: 32–193 (5150–5975 MHz)

### Data rate<sup>2</sup>

- 802.11ax: 2402 Mbps

### Maximum power of the transmitter<sup>1</sup>

- 5 GHz: 27 dBm

### Antenna parameters

- Gain: 18 dBi
- Linear polarization: H/V
- SWR: no more than 2
- Beam width (H): 18°
- Beam width (V): 18°

### Receiver sensitivity

- 5 GHz: up to -96 dBm

### Number of clients

- Recommended number of clients: 5
- Maximum number of connections: 64

### Physical specifications

- Power consumption: no more than 10 W
- 128 MB SPI-NAND Flash
- 256 MB DDR3 RAM
- Power: Passive PoE 24 V
- Operating temperature: from -45 to +65 °C
- Ingress protection: IP65
- Dimensions (W × H × D):
  - 250 × 250 × 65 mm
  - 250 × 250 × 97 mm (with cable gland)
- Weight: 1.2 kg
- Pole/wall mount
- VESA size: 100 × 100

<sup>1</sup>The number of channels and the value of the maximum output power will vary according to the rules of radio frequency regulation in your country.

<sup>2</sup>The maximum wireless data rate is defined according to IEEE 802.11 standards. The real bandwidth can be different. Conditions of the network, environment, the amount of traffic, building materials and constructions and network service data can decrease the real bandwidth. The environment can influence the network coverage range.

Ordering information

| Name      | Description                                                                            |
|-----------|----------------------------------------------------------------------------------------|
| WB-3P-LR5 | WB-3P-LR5 wireless user station. Passive PoE 24 V injector, power cable, mounting kit. |

Contact us

About Eltex



+7 (383) 274 10 01  
+7 (383) 274 48 48



eltex@eltex.ru



eltex-co.com

Eltex Enterprise is a leading Russian developer and manufacturer of communication equipment with 30 years of history. Complete solutions and their seamless integrability into the Customer's infrastructure are the priority growth areas of the company.